

MINI & SUPER MINI INDICATOR SYSTEMS

Mini Indicator System

Matherne Instrumentation's mini indicator system is designed to give accurate reading for small drilling rigs, production rigs, and well service units from 10,000 to 30,000 lbs. single line load when reeving two to eight lines. The system includes 6" or 8-½" indicator mounted in a metal box, hose, tension cylinder, shackle, and clevis with pins.

The system needs no deadline anchor, it mounts directly to the rig floor or substructure.

FEATURES:

- 6" or 8-½" dial face with colorful custom logos
- Standard capacities up to 240,000 lbs
- Dual scales and metric equivalents in Kg and DaN are available

ORDERING SPECIFICATIONS:

- Single Line Load
- Derrick capacity
- Size of drilling line
- Number of lines strung in blocks
- Hose length
- Dial scale
- Cylinder style



Mini Weight Indicator in Steel Box

Super Mini Indicator System

Matherne Instrumentation's super mini indicator system is designed to give accurate reading for small drilling rigs, production rigs, and well service units from 10,000 to 30,000 lbs. single line load when reeving two to eight lines. Uses a tension loadcell for improved sensitivity in the larger capacity ranges. The system includes 6" or 8.5" indicator mounted in a metal box, hose, tension loadcell, shackle, and clevis with pins.


The system needs no deadline anchor, it mounts directly to the rig floor or substructure.

FEATURES:

- 6" or 8-½" dial face with colorful custom logos
- Standard capacities up to 240,000 lbs
- Dual scales and metric equivalents in Kg and DaN are available

ORDERING SPECIFICATIONS:

- Single Line Load
- Derrick capacity
- Size of drilling line
- Number of lines strung in blocks
- Hose length
- Dial scale
- Load cell style

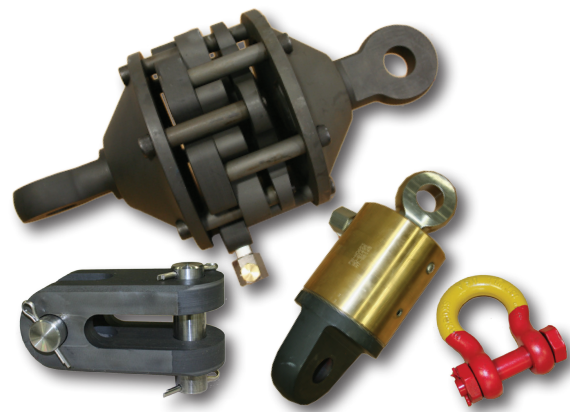

Clevis, Load Cell, Tension Cylinder and Shackle