

## THREE-PUMP DIGITAL STROKE RATE METER Model 1134

The **Three-pump Digital Stroke Rate Meter** monitors and displays the rate and total strokes of up to three individual pumps simultaneously. The unit continually displays, on large easy to read, low power LCD Displays, RPM, TOTAL ACCUMULATED STROKES (0- 9999 total strokes) and STROKE RATE (8- 350 strokes per minute) for each pump. The unit is internally powered by a battery source having an operational life of 3 years.

The unit requires no calibration. It has a unique low-low voltage shutdown, preventing damage to the LCD displays due to extremely low operating voltages. The enclosure is waterproof, IP-66 rated and is of all stainless-steel construction. All labels are etched permanently into the enclosure. The entire package is designed to operate reliably in the harsh environment of high vibration, moisture and constant usage of both land and offshore drilling operations.

### FEATURES, Model 1134:

- **INTRINSICALLY SAFE DESIGN** Safe operation in Class I, Division 1, Group A,B,C and D
- **TRUE THREE PUMP OPERATION** Always monitors all three pumps
- **SELF POWERED FOR 3 YEARS** No external power required
- **LOW VOLTAGE SHUTDOWN** Eliminates LCD failures due to low battery voltage
- **STAINLESS-STEEL CASE** Rugged IP-66 (NEMA 4X) construction

The Digital Stroke Rate Meter System can be supplied in various configurations depending on customer requirements. Packages can be quoted with or without cables and/or junction boxes, depending on the need for an installation that will be permanent or be broken down for moving from site to site. This system can be combined with other Matherne Instrumentation/Innovative Electronics packages for complete consoles containing both hydraulic and electronic gauges and instruments, including computer systems.



Model 1134 Three-pump Digital Stroke Rate Meter

### SPECIFICATIONS, Model 1134:

**DIMENSIONS:** 8X10.375X2.5in (HWD)  
(20,3x26,3x6,3 cm)


**WEIGHT:** 6.25 lbs. (2,83kg)

**POWER:** 3-year, Internal Battery

**TEMPERATURE:** -40°F to +180°F (-40°F to +82°C)

**RANGE:** 8 to 350 Strokes Per Minute 0- 9999 Total Strokes

Three Pump Mechanical Switch Input Cable 125'

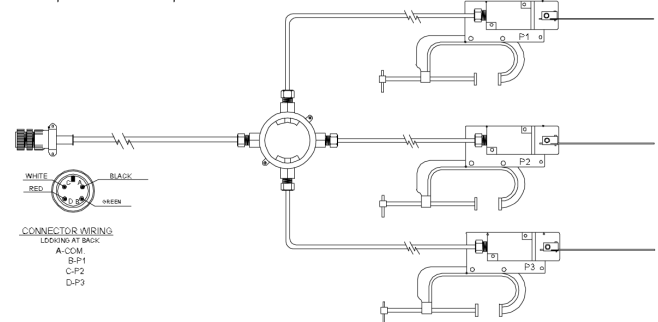

Mechanical Pump Switch

